



AMAZON[®]
LUBRICANTS
PRODUCT CATALOGUE

About Us

Amazon Lubricants: A Beacon of Innovation and Sustainability in the Lubricants Industry in the dynamic world of lubricants, Amazon Lubricants stands tall as a beacon of innovation and sustainability. Founded in 2018, our company has swiftly established itself as a leading manufacturer and exporter of high-quality industrial lubricants, catering to a global clientele across MENA, CIS, Africa, and beyond.

At the heart of our success lies an unwavering commitment to cutting-edge research and development. Our state-of-the-art laboratory, staffed by a team of brilliant minds, continuously explores new frontiers in lubricant technology. This relentless pursuit of innovation has led to the development of a comprehensive range of lubricants that meet the ever-evolving needs of our customers.

Our commitment extends beyond innovation to encompass sustainability. We recognize the profound impact our industry has on the environment, and we are dedicated to minimizing our footprint. Our manufacturing processes adhere to the strictest environmental standards, and we actively seek ways to reduce waste and promote circularity.

Amazon Lubricants is not merely a manufacturer of lubricants; we are a trusted partner to our customers. We understand the unique challenges they face and tailor our solutions to address their specific needs. Our team of dedicated professionals is always available to provide expert advice and support, ensuring that our customers can operate smoothly and efficiently.

As we look towards the future, Amazon Lubricants remains steadfast in its pursuit of excellence. We are committed to

Innovation and Development

Relentlessly innovating and developing world-class lubricants that empower businesses and societies to operate efficiently, responsibly, and sustainably.

Highest Standard of Quality

Upholding the highest standards of quality and precision in our manufacturing processes, ensuring the consistent production of exceptional lubricants.

Collaboration

Collaborating with our customers and partners to drive innovation and sustainability across the lubricants industry.



PLANT :
New Industrial Area, UAQ, UAE
Ph: 00971 54 7047811

info@amazonlubricants.com
www.amazonlubricants.com



MAIN OFFICE:
Suite 1, Cochrane House , Admirals Way,
Isle Of Dogs,
London E14 9ud, United Kingdom
+44 203 719 0255
+44 79 49 439 459

Approval & Certificates

The image displays four SAE License Agreements (SCHEDULE A - LICENSE AGREEMENT) from API Engines and SAE International. Each agreement is for a different engine model:

- 1. API 6000 Series (SAE J1939)
- 2. API 6000 Series (SAE J1939)
- 3. API 6000 Series (SAE J1939)
- 4. API 6000 Series (SAE J1939)

 Each document includes a table of specifications and a signature from the SAE International representative.

Certificate of Registration
Awarded to
AMAZON LUBRICANTS AND GREASE L.L.C
at
P.O. BOX NO. 343133, NEW INDUSTRIAL AREA, UMM AL QUWAIN, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 45001:2018
Occupational Health and Safety Management Systems
Scope of work
MANUFACTURING OF LUBRICANTS & GREASE

IAS ID
Certificate No: AMU13005
Originally Registered: 16 FEB 2019
Latest Issue: 05 MAR 2022
Valid up to: 15 FEB 2025

Certificate of Registration
Awarded to
AMAZON LUBRICANTS AND GREASE L.L.C
at
P.O. BOX NO. 343133, NEW INDUSTRIAL AREA, UMM AL QUWAIN, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 9001:2015
Quality Management Systems
Scope of work
MANUFACTURING OF LUBRICANTS & GREASE

IAS ID
Certificate No: AMU13022
Originally Registered: 16 FEB 2019
Latest Issue: 05 MAR 2022
Valid up to: 15 FEB 2025

Certificate of Registration
Awarded to
AMAZON LUBRICANTS AND GREASE L.L.C
at
P.O. BOX NO. 343133, NEW INDUSTRIAL AREA, UMM AL QUWAIN, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 14001:2015
Environmental Management Systems
Scope of work
MANUFACTURING OF LUBRICANTS & GREASE

IAS ID
Certificate No: AMU13005
Originally Registered: 16 FEB 2019
Latest Issue: 05 MAR 2022
Valid up to: 15 FEB 2025

Statement of Quality
AMAZON SUPER PLUS SAE 20W-50 API CH-4/SJ

We hereby confirm that **AMAZON SUPER PLUS SAE 20W-50 API CH-4/SJ** engine oil formulated and blended with Afton Chemical US additive package **HTCC™ 1200W** at **9.7% mass** of code **LSB 20509** meets the performance of:

Caterpillar ECF-1a

This statement is invalidated if the formulation and/or recommended blending procedures have been changed.

For Afton Chemical Ltd.
P.P. E Toprak
Customer Technical Service Technologist
January 2020

Statement of Quality
AMAZON SUPER PLUS SAE 15W-40 API CH-4/SJ

We hereby confirm that **AMAZON SUPER PLUS SAE 15W-40 API CH-4/SJ** engine oil formulated and blended with Afton Chemical US additive package **HTCC™ 1200W** at **9.7% mass** of code **LSB 12215-0** meets the performance of:

M 3275-1
Caterpillar ECF-1a

This statement is invalidated if the formulation and/or recommended blending procedures have been changed.

For Afton Chemical Ltd.
P.P. E Toprak
Customer Technical Service Technologist
January 2020

Statement of Quality
AMAZON SUPER PLUS SAE 15W-40 API CH-4/SJ

We hereby confirm that **AMAZON SUPER PLUS SAE 15W-40 API CH-4/SJ** engine oil formulated and blended with Afton Chemical US additive package **HTCC™ 1200W** at **9.7% mass** of code **LSB 12215-0** meets the performance of:

M 3275-1
Caterpillar ECF-1a

This statement is invalidated if the formulation and/or recommended blending procedures have been changed.

For Afton Chemical Ltd.
P.P. E Toprak
Customer Technical Service Technologist
January 2020





GASOLINE ENGINE OIL

EXTREME
PERFORMANCE



AMAZON
LUBRICANTS



GENUINE SAE 0W-16 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-16 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 42.0 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.25 |
| 5 | Viscosity Index | D 2270 | 176 |
| 6 | Flash Point ,COC, °C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-16 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-16 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ILSAC GF-6B



GENUINE SAE 0W-20 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-20 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 46.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.8 |
| 5 | Viscosity Index | D 2270 | 172 |
| 6 | Flash Point ,COC, °C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-20 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-20 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C962-A/WSS-M2C947-B1, DEXOS1™ Gen3, CHRYSLER Ms6395



GENUINE SAE 0W-30 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 65.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.6 |
| 5 | Viscosity Index | D 2270 | 175 |
| 6 | Flash Point ,COC, °C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -45 |
| 8 | TBN mg/KOH/g | D 2896 | 8.0 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-30 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-30 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C960-A/WSS-M2C945-B1, DEXOS1™ Gen3, CHRYSLER Ms6395





GENUINE SAE 0W-40 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 92.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.2 |
| 5 | Viscosity Index | D 2270 | 174 |
| 6 | Flash Point ,COC, °C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 8.1 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-40 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-40 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ACEA A3/B4, MB 229.3, MB 229.5, PORSCHE A40, VW 502.00/505.00.



GENUINE SAE 5W-20 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-20 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 47.9 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.95 |
| 5 | Viscosity Index | D 2270 | 165 |
| 6 | Flash Point ,COC, °C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-20 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-20 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C960-A/WSS-M2C945-B1, DEXOS1™ Gen3, CHRYSLER Ms6395



GENUINE SAE 5W-30 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 75.9 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 12.1 |
| 5 | Viscosity Index | D 2270 | 156 |
| 6 | Flash Point ,COC, °C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 8.1 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-30 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-30 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C961-A/WSS-M2C946-B1, DEXOS1™ Gen3, CHRYSLER Ms6395





GENUINE SAE 5W-40 SP

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 86.8 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.1 |
| 5 | Viscosity Index | D 2270 | 168 |
| 6 | Flash Point ,COC,°C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-40 API SP is advanced high performance fully synthetic engine oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-40 meets and exceeds the requirements of various vehicle manufacturer and industry standard and out performs conventional oils.

MEETS OR EXCEEDS: API SP, ACEA A3/B4, MB 229.5, PORCSHE A40, VW 502.00/505.00, RENAULT RN 0700/0710



GENUINE SAE 0W-16 SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-16 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 41.6 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.1 |
| 5 | Viscosity Index | D 2270 | 172 |
| 6 | Flash Point ,COC,°C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -45 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-16 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-16 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182



GENUINE SAE 0W-20 SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-20 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 43.0 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.3 |
| 5 | Viscosity Index | D 2270 | 172 |
| 6 | Flash Point ,COC,°C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -45 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-20 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-20 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182





GENUINE SAE 0W-30 SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 65.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.7 |
| 5 | Viscosity Index | D 2270 | 176 |
| 6 | Flash Point ,COC, °C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-30 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-30 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182



GENUINE SAE 0W-40 SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 0W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 86.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.5 |
| 5 | Viscosity Index | D 2270 | 175 |
| 6 | Flash Point ,COC, °C | D 92 | 228 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 0W-40 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 0W-40 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182



GENUINE SAE 5W-20 SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-20 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 46.3 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.8 |
| 5 | Viscosity Index | D 2270 | 165 |
| 6 | Flash Point ,COC, °C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-20 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-20 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-945A, DEXOS1™, GMW16096/16182



GENUINE SAE 5W-30 SN



| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 69 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.8 |
| 5 | Viscosity Index | D 2270 | 165 |
| 6 | Flash Point ,COC, °C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -39 |
| 8 | TBN mg/KOH/g | D 2896 | 7.0 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-30 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-30 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-946A, DEXOS1™, GMW 16181, GMW15827



GENUINE SAE 5W-40 SN



| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 84 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 13.5 |
| 5 | Viscosity Index | D 2270 | 168 |
| 6 | Flash Point ,COC, °C | D 92 | 230 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 7.3 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-40 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 5W-40 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, ACEA A3/B4-16, MB229.3, MB229.5, PORSCHE A40, VW 502.00/505.00, RENAULT RN 0710/0700, GM-LL-B-025, BMW LL-01



GENUINE SAE 10W-30 SN



| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 76 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.9 |
| 5 | Viscosity Index | D 2270 | 152 |
| 6 | Flash Point ,COC, °C | D 92 | 228 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-30 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-30 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ILSAC GF-5, CHRYSLER MS-6395



GASOLINE ENGINE OIL

AMAZON
LUBRICANTS

EXTREME PERFORMANCE



PRODUCT DESCRIPTION:

SAE 10W-40 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-40 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk



GENUINE SAE 10W-40 SN

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.2 |
| 5 | Viscosity Index | D 2270 | 151 |
| 6 | Flash Point ,COC, °C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |



PRODUCT DESCRIPTION:

SAE 10W-50 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-50 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

GENUINE SAE 10W-50 SN

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 80 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 12.1 |
| 5 | Viscosity Index | D 2270 | 165 |
| 6 | Flash Point ,COC, °C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |



GENUINE SAE 10W-60 SN



PRODUCT DESCRIPTION:

SAE 10W-60 API SN is advanced high performance fully synthetic motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-60 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SN, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk





INFINITY SAE 5W-30 SM

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 102 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.8 |
| 5 | Viscosity Index | D 2270 | 151 |
| 6 | Flash Point ,COC, °C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 7.4 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-30 API SM is high performance semi synthetic passenger car motor oil designed to provide optimum performance in high output, multi valve, turbo charge & super charged gasoline engines of passenger cars, vans and light trucks.

MEETS OR EXCEEDS: API SM, ILSAC GF-5, FORD WSS-M2C-946A, DEXOS1™, GMW 16181, GMW15827



INFINITY SAE 5W-40 SM

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 102 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.8 |
| 5 | Viscosity Index | D 2270 | 151 |
| 6 | Flash Point ,COC, °C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 7.4 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-40 API SM is high performance semi synthetic passenger car motor oil designed to provide optimum performance in high output, multi valve, turbo charge & super charged gasoline engines of passenger cars, vans and light trucks.

MEETS OR EXCEEDS: API SM, ILSAC GF-5, ACEA A3/B4-16, MB229.3, MB229.5, PORSCHE A40, VW 502.00/505.00, RENAULT RN 0710/0700, GM-LL-B-025, BMW LL-01



INFINITY SAE 10W-40 SM

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.5 |
| 5 | Viscosity Index | D 2270 | 148 |
| 6 | Flash Point ,COC, °C | D 92 | 224 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-40 API SM is high performance semi synthetic passenger car motor oil designed to provide optimum performance in high output, multi valve, turbo charge & super charged gasoline engines of passenger cars, vans and light trucks.

MEETS OR EXCEEDS: API SM, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1





MEGA SAE 10W-30 SM

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 78 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.9 |
| 5 | Viscosity Index | D 2270 | 147 |
| 6 | Flash Point ,COC, °C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 7.1 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-30 API SM is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-30 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SM, ILSAC GF-5, CHRYSLER MS-6395



MEGA SAE 15W-40 SM

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 15W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.5 |
| 5 | Viscosity Index | D 2270 | 148 |
| 6 | Flash Point ,COC, °C | D 92 | 226 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 15W-40 API SM is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 15W-40 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SM, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1



MEGA SAE 20W-50 SM

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 20W-50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 178.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 19.3 |
| 5 | Viscosity Index | D 2270 | 125 |
| 6 | Flash Point ,COC, °C | D 92 | 238 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 20W-50 API SM is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 20W-50 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SM, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1





ELITE SAE 10W-30 SL

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 80 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 12.1 |
| 5 | Viscosity Index | D 2270 | 165 |
| 6 | Flash Point ,COC,°C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 7.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 10W-30 API SL is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-30 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1



ELITE SAE 10W-40 SL

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 110 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.5 |
| 5 | Viscosity Index | D 2270 | 149 |
| 6 | Flash Point ,COC,°C | D 92 | 223 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 7.4 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 10W-40 API SL is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 10W-40 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SL, ACEA A3/B3-16, MB 229.1, JASO MA2, VW 501.01/505.00, VW 502.00/505.00, MB 229.3



ELITE SAE 20W-50 SL

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 20W-50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 178.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 19.63 |
| 5 | Viscosity Index | D 2270 | 126 |
| 6 | Flash Point ,COC,°C | D 92 | 238 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 7.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 20W-50 API SL is advanced high performance mineral motor oil designed to help deliver outstanding engine protection and enhanced fuel economy. SAE 20W-50 viscosity grade oils are commonly recommended for use in many new vehicles with modern engine technology to help maximize engine performance and provide horse power protection.

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1





ELITE SAE 10W-40 SL-4T

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 95.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.2 |
| 5 | Viscosity Index | D 2270 | 152 |
| 6 | Flash Point ,COC, °C | D 92 | 226 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | TBN mg/KOH/g | D 2896 | 7.3 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

10W-40 SL 4T is modern technology gasoline engine oil specifically formulated for Four-Stroke motor cycle engines available in popular multi grades and meeting with API SL Specification. In addition it meets the new JASO MA2 specification which has been developed to meet the requirements for the engine and the wet clutch lubrication to provide smooth gear shift operations.

MEETS OR EXCEEDS: API SL-4T, JASO MA2



ELITE SAE 20W-40 SL-4T

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 20W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 129.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.6 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC, °C | D 92 | 236 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 7.4 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

20W-40 SL 4T is modern technology gasoline engine oil specifically formulated for Four-Stroke motor cycle engines available in popular multi grades and meeting with API SL Specification. In addition it meets the new JASO MA2 specification which has been developed to meet the requirements for the engine and the wet clutch lubrication to provide smooth gear shift operations.

MEETS OR EXCEEDS: API SL-4T, JASO MA2



ELITE SAE 20W-50 SL-4T

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 20W-50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 167.4 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 18.8 |
| 5 | Viscosity Index | D 2270 | 127 |
| 6 | Flash Point ,COC, °C | D 92 | 236 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 7.4 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

20W-50 SL 4T is modern technology gasoline engine oil specifically formulated for Four-Stroke motor cycle engines available in popular multi grades and meeting with API SL Specification. In addition it meets the new JASO MA2 specification which has been developed to meet the requirements for the engine and the wet clutch lubrication to provide smooth gear shift operations.

MEETS OR EXCEEDS: API SL-4T, JASO MA2





DIESEL ENGINE OIL



**EXTREME
PERFORMANCE**





PREMIUM SUPER SAE 5W-30 CK-4/SN

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 69 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.8 |
| 5 | Viscosity Index | D 2270 | 168 |
| 6 | Flash Point ,COC,°C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -42 |
| 8 | TBN mg/KOH/g | D 2896 | 1.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-30 API CK-4/SN is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CK-4/SN, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16



PREMIUM SUPER SAE 10W-30 CK-4/SN

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 75 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.8 |
| 5 | Viscosity Index | D 2270 | 152 |
| 6 | Flash Point ,COC,°C | D 92 | 224 |
| 7 | Pour Point, °C | D 97 | -39 |
| 8 | TBN mg/KOH/g | D 2896 | 1.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-30 API CK-4/SN is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CK-4/SN, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16



PREMIUM SUPER SAE 10W-40 CK-4/SN

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.2 |
| 5 | Viscosity Index | D 2270 | 158 |
| 6 | Flash Point ,COC,°C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 1.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-40 API CK-4/SN is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CK-4/SN, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16





PREMIUM SUPER SAE 15W-40 CK-4/SN

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 15W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 105 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.5 |
| 5 | Viscosity Index | D 2270 | 149 |
| 6 | Flash Point ,COC,°C | D 92 | 224 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 1.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 15W-40 API CK-4/SN is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CK-4/SN, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, FORD WSS-M2C171-F1, ACEA E7-16, ACEA E9-16



PREMIUM SUPER SAE 15W-40 CJ-4

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 15W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 98.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.27 |
| 5 | Viscosity Index | D 2270 | 148 |
| 6 | Flash Point ,COC,°C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | TBN mg/KOH/g | D 2896 | 11.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 15W-40 API CJ-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CJ-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16



PREMIUM SUPER SAE 5W-30 CI-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-30 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 105 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.0 |
| 5 | Viscosity Index | D 2270 | 164 |
| 6 | Flash Point ,COC,°C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -39 |
| 8 | TBN mg/KOH/g | D 2896 | 10.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-30 API CI-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.3, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2





PREMIUM SUPER SAE 5W-40 CI-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 5W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.8 |
| 5 | Viscosity Index | D 2270 | 166 |
| 6 | Flash Point ,COC,°C | D 92 | 222 |
| 7 | Pour Point, °C | D 97 | -36 |
| 8 | TBN mg/KOH/g | D 2896 | 1.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 5W-40 API CI-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.3, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF -2



PREMIUM SUPER SAE 10W-40 CI-4

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 10W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 98.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.27 |
| 5 | Viscosity Index | D 2270 | 148 |
| 6 | Flash Point ,COC,°C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -33 |
| 8 | TBN mg/KOH/g | D 2896 | 10.6 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 10W-40 API CI-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, B228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF -2



PREMIUM SUPER SAE 15W-40 CI-4

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 15W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 111.6 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.2 |
| 5 | Viscosity Index | D 2270 | 142 |
| 6 | Flash Point ,COC,°C | D 92 | 236 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | TBN mg/KOH/g | D 2896 | 10.7 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 15W-40 API CI-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, B228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF -2





CLASSIC SAE 15W-40 CI-4/SL

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 15W-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 109.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.52 |
| 5 | Viscosity Index | D 2270 | 136 |
| 6 | Flash Point ,COC,°C | D 92 | 234 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | TBN mg/KOH/g | D 2896 | 10.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 15W-40 API CI-4/SL is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4/SL, ACEA E7-16, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, MB 228.3



CLASSIC SAE 20W-50 CI-4/SL

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 20W-50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 165 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 18.5 |
| 5 | Viscosity Index | D 2270 | 126 |
| 6 | Flash Point ,COC,°C | D 92 | 236 |
| 7 | Pour Point, °C | D 97 | -27 |
| 8 | TBN mg/KOH/g | D 2896 | 11.2 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 20W-50 API CI-4/SL is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CI-4/SL, ACEA E7-16, MAN 3275, CATERPILLAR ECF -1A, MB 228.3



CLASSIC SAE HD-40 CH-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE HD-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 144 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.4 |
| 5 | Viscosity Index | D 2270 | 109 |
| 6 | Flash Point ,COC,°C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -21 |
| 8 | TBN mg/KOH/g | D 2896 | 10.1 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE HD-40 API CH-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CH-4, MB228.1, MAN 3275, CATERPILLAR ECF -1A, ACEA E7-16





CLASSIC SAE HD-50 CH-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE HD-40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 144 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.4 |
| 5 | Viscosity Index | D 2270 | 109 |
| 6 | Flash Point ,COC,°C | D 92 | 232 |
| 7 | Pour Point, °C | D 97 | -21 |
| 8 | TBN mg/KOH/g | D 2896 | 10.1 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE HD-50 API CH-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CH-4, MB228.1, MAN 3275, CATERPILLAR ECF-1A, ACEA E7-16



CLASSIC SAE HD-60 CH-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE HD-60 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 207 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 23.4 |
| 5 | Viscosity Index | D 2270 | 139 |
| 6 | Flash Point ,COC,°C | D 92 | 238 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | TBN mg/KOH/g | D 2896 | 10.5 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE HD-60 API CH-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CH-4, MB228.1, MAN 3275, CATERPILLAR ECF-1A, ACEA E7-16



CLASSIC SAE HD-70 CH-4

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE HD-70 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L3.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 252 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 27.2 |
| 5 | Viscosity Index | D 2270 | 141 |
| 6 | Flash Point ,COC,°C | D 92 | 242 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | TBN mg/KOH/g | D 2896 | 10.8 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE HD-70 API CH-4 is a high performance diesel engineered to provide lubrication to modern, high performance, low emission engines used in severe applications. This engine oil is designed using the high performance base oils which provide excellent low temperature fluidity, high temperature viscosity retention and volatility control. It is developed to comply low emission norms EURO I, II, III, IV & V and extended drain intervals.

MEETS OR EXCEEDS: API CH-4, MB228.1, MAN 3275, CATERPILLAR ECF-1A, ACEA E7-16



CLASSIC SAE 40 CF-4



| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 40 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 149 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 15.5 |
| 5 | Viscosity Index | D 2270 | 106 |
| 6 | Flash Point ,COC, °C | D 92 | 233 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | TBN mg/KOH/g | D 2896 | 9.3 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 40 API CF-4 is high performance mono-grade diesel engine oil formulated from advanced technology base stocks and a balanced additives system. They are specifically engineered for performance for inter-cooled turbo charged engines operating under severe on and off high way conditions. It can be used in a wide range of applications where a mono-grade is recommended.

MEETS OR EXCEEDS: API CF-4



CLASSIC SAE 50 CF-4



| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 50 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 185 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 19 |
| 5 | Viscosity Index | D 2270 | 116 |
| 6 | Flash Point ,COC, °C | D 92 | 234 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | TBN mg/KOH/g | D 2896 | 9.0 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 50 API CF-4 is high performance mono-grade diesel engine oil formulated from advanced technology base stocks and a balanced additives system. They are specifically engineered for performance for inter-cooled turbo charged engines operating under severe on and off high way conditions. It can be used in a wide range of applications where a mono-grade is recommended.

MEETS OR EXCEEDS: API CF-4



CLASSIC SAE 60 CF-4



| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 60 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 185 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 19 |
| 5 | Viscosity Index | D 2270 | 116 |
| 6 | Flash Point ,COC, °C | D 92 | 234 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | TBN mg/KOH/g | D 2896 | 9.0 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

SAE 60 API CF-4 is high performance mono-grade diesel engine oil formulated from advanced technology base stocks and a balanced additives system. They are specifically engineered for performance for inter-cooled turbo charged engines operating under severe on and off high way conditions. It can be used in a wide range of applications where a mono-grade is recommended.

MEETS OR EXCEEDS: API CF-4



DIESEL ENGINE OIL



GEAR OIL



EXTREME
PERFORMANCE





HYPOID SAE 75W-80 GL-4

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 75W-80 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 56.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 9.7 |
| 5 | Viscosity Index | D 2270 | 159 |
| 6 | Flash Point ,COC,°C | D 92 | 210 |
| 7 | Pour Point, °C | D 97 | -36 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 75W-80 GL-4 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743-6 CKC, SAE J2360, AGMA 252.04, MT-1



HYPOID SAE 75W-90 GL-4

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 75W-90 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 99 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.8 |
| 5 | Viscosity Index | D 2270 | 156 |
| 6 | Flash Point ,COC,°C | D 92 | 210 |
| 7 | Pour Point, °C | D 97 | -30 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 75W-90 GL-4 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743-6 CKC, SAE J2360, AGMA 252.04, MT-1



HYPOID SAE 80W-140 GL-4

| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| 75W-140 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 211.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 25.6 |
| 5 | Viscosity Index | D 2270 | 153 |
| 6 | Flash Point ,COC,°C | D 92 | 218 |
| 7 | Pour Point, °C | D 97 | -37 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 80W-140 GL-4 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743-6 CKC, SAE J2360, AGMA 252.04, MT-1

HYPROID SAE 80W-90 GL-5



| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 80W-90 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 155 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 17.5 |
| 5 | Viscosity Index | D 2270 | 124 |
| 6 | Flash Point ,COC,°C | D 92 | 210 |
| 7 | Pour Point, °C | D 97 | -21 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 80W-90 GL-5 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: MAN 342 M1, SCANIA ST0 1.0, VOLVO 1273.10

HYPROID SAE 85W-140 GL-5



| TECHNICAL DATA | | | |
|--------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 85W-140 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 303 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 27.3 |
| 5 | Viscosity Index | D 2270 | 120 |
| 6 | Flash Point ,COC,°C | D 92 | 216 |
| 7 | Pour Point, °C | D 97 | -18 |

AVAILABLE PACKS
1, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 85W-140 GL-5 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: MAN 342 M1, SCANIA ST0 1.0, ZF TE-ML05A

HYPROID SAE 90 GL-5



| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 90 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 155 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 16.5 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC,°C | D 92 | 212 |
| 7 | Pour Point, °C | D 97 | -21 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

SAE 90 GL-5 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: MAN 342 M1, SCANIA ST0 1.0, VOLVO 1273.10

HYPROID SAE 140 GL-5



| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| SAE 140 | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 265 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 27.4 |
| 5 | Viscosity Index | D 2270 | 136 |
| 6 | Flash Point ,COC,°C | D 92 | 224 |
| 7 | Pour Point, °C | D 97 | -15 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:


SAE 140 GL-5 gear and transmission Mineral oil suitable for use in cars, trucks, buses, construction plant equipment's. It is prepared from high quality base oils and incorporates balanced, extreme pressure chemical technology to minimise scuffing for trucks and coaches equipped with ZF manual gear boxes.

MEETS OR EXCEEDS: MAN 342 M1, SCANIA ST0 1.0, ZF TE-ML 05A

GEAR OIL



AUTOMATIC TRANSMISSION FLUID

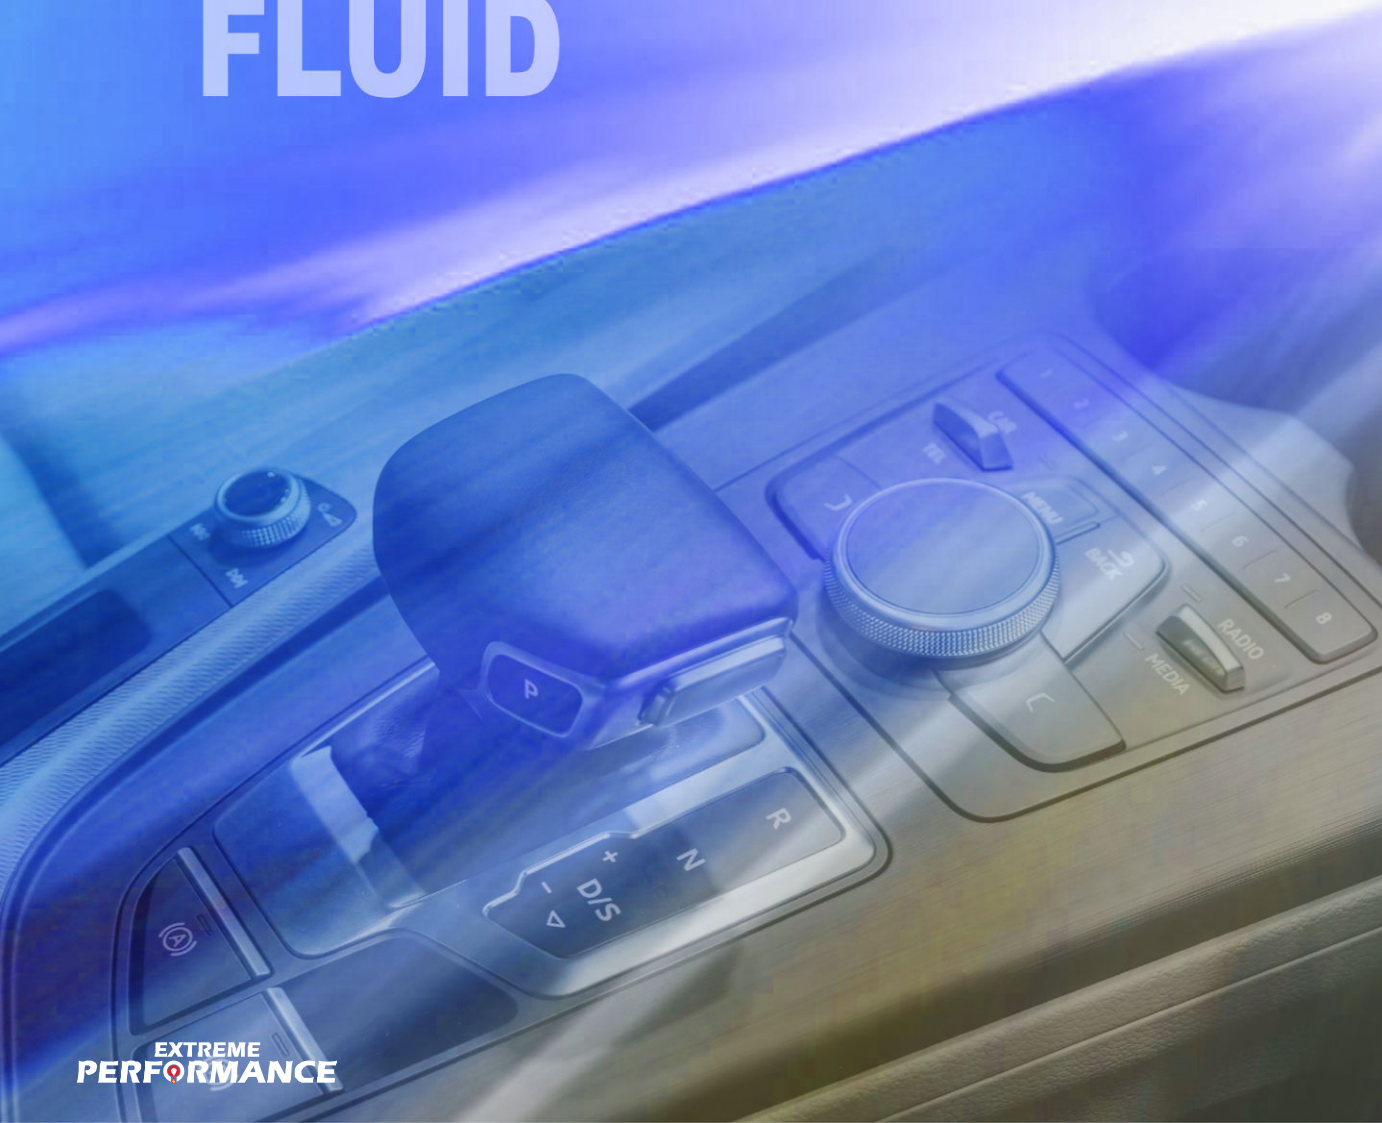

EXTREME
PERFORMANCE





RAPID ATF TYPE A

| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| TYPE A | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 39.6 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 7.2 |
| 5 | Viscosity Index | D 92 | 147 |
| 6 | Flash Point ,COC,°C | D 97 | 210 |
| 7 | Pour Point, °C | D 445 | -24 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF TYPE A is an automatic transmission fluid developed for the automatic transmissions and power steering systems of vehicles specifying use of General Motors TYPE A SUFFIX A quality fluids. The highly refined base oils and proven performance additives used in this oil provide enhanced thermal stability, frictional characteristics and rust & Corrosion protection. It exceeds the performance requirements of GM TYPE A SUFFIX A specification.

MEETS OR EXCEEDS: MAN 339Z1.V1, MB236.1., ZF TE-ML03D, 04D, 14A, ZF TE-ML 17C,03D



RAPID ATF DEXRON II

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| DEXRON II | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 36.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 7.1 |
| 5 | Viscosity Index | D 92 | 161 |
| 6 | Flash Point ,COC,°C | D 97 | 212 |
| 7 | Pour Point, °C | D 445 | -33 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF DEXRON II is a versatile high performance ATF, which meets the comprehensive requirements of General Motors Dexron II specification. ATF DEXRON II is recommended for many passenger cars and commercial vehicle automatic transmissions. Additionally, it is suitable for power assisted steering systems and various manual gearboxes for which ATF is specified.

MEETS OR EXCEEDS: DEXRON II, ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H



RAPID ATF DEXRON III

| TECHNICAL DATA | | | |
|-------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| DEXRON III | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 35 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 7.1 |
| 5 | Viscosity Index | D 92 | 171 |
| 6 | Flash Point ,COC,°C | D 97 | 212 |
| 7 | Pour Point, °C | D 445 | 36 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF DEXRON III is a versatile high performance ATF, which meets the comprehensive requirements of General Motors Dexron III specification. ATF DEXRON III is recommended for many passenger cars and commercial vehicle automatic transmissions. Additionally, it is suitable for power assisted steering systems and various manual gearboxes for which ATF is specified.

MEETS OR EXCEEDS: DEXRON III, ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H



RAPID ATF DEXRON IV

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| DEXRON IV | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 34.7 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 7.1 |
| 5 | Viscosity Index | D 92 | 173 |
| 6 | Flash Point ,COC, °C | D 97 | 212 |
| 7 | Pour Point, °C | D 445 | 36 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF DEXRON IV is a versatile high performance ATF, which meets the comprehensive requirements of General Motors Dexron IV specification. ATF DEXRON IV is recommended for many passenger cars and commercial vehicle automatic transmissions. Additionally, it is suitable for power assisted steering systems and various manual gearboxes for which ATF is specified.

MEETS OR EXCEEDS: DEXRON IV, ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H



RAPID ATF DEXRON VI

| TECHNICAL DATA | | | |
|------------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| DEXRON VI | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 39.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 7.5 |
| 5 | Viscosity Index | D 92 | 163 |
| 6 | Flash Point ,COC, °C | D 97 | 218 |
| 7 | Pour Point, °C | D 445 | -42 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF DEXRON VI is a versatile high performance ATF, which meets the comprehensive requirements of General Motors Dexron VI specification. ATF DEXRON VI is recommended for many passenger cars and commercial vehicle automatic transmissions. Additionally, it is suitable for power assisted steering systems and various manual gearboxes for which ATF is specified.

MEETS OR EXCEEDS: DEXRON VI, CHRYSLER M1375.4, AUDI/VW G-052-162-A1/A2, BMW ETL-7045, 7045E, JAGUAR ATF 3403 M115, VOLVO 97340



RAPID CVT

| TECHNICAL DATA | | | |
|----------------|---|--------|-----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS |
| CVT | | | |
| 1 | Appearance | Visual | Clear & Bright |
| 2 | Color | Visual | Red |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 35 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 2270 | 6.9 |
| 5 | Viscosity Index | D 92 | 161 |
| 6 | Flash Point ,COC, °C | D 97 | 218 |
| 7 | Pour Point, °C | D 445 | -42 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L Bulk

PRODUCT DESCRIPTION:

ATF CVT is a versatile high performance ATF, which meets the comprehensive requirements of General Motors Dexron II specification. ATF CVT is recommended for many passenger cars and commercial vehicle automatic transmissions. Additionally, it is suitable for power assisted steering systems and various manual gearboxes for which ATF is specified.

MEETS OR EXCEEDS: CVT, HYUNDAI SP CVT 1, KIA SP CVT-1, TOYOTA TC, NISSAN CVS NS-2



INDUSTRIAL OIL



EXTREME
PERFORMANCE





HYDRO AW 10W

| TECHNICAL DATA | | | |
|----------------|---|--------|---------|
| S. No. | DESCRIPTION | METHOD | ISO 10W |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 10.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 2.76 |
| 5 | Viscosity Index | D 2270 | 104 |
| 6 | Flash Point ,COC,°C | D 92 | 138 |
| 7 | Pour Point, °C | D 97 | -30 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 10W series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: Denison HF-1, HF-2 & HF-0, DIN 51524 & part 2, Ford M-6C32, B.F. Goodrich 0152, General Motors LH-04-1 / LH-06-1 / LH-15-1, Cincinnati Milacron P-68, P-69 & P-70, US Steel 136 & 127



HYDRO AW 32

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 32 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 32.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 5.44 |
| 5 | Viscosity Index | D 2270 | 102 |
| 6 | Flash Point ,COC,°C | D 92 | 184 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 32 series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: CINCINNATI P-68, DIN 51524-2



HYDRO AW 46

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 46 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 46.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 6.85 |
| 5 | Viscosity Index | D 2270 | 102 |
| 6 | Flash Point ,COC,°C | D 92 | 220 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 46 series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: CINCINNATI P-70, DIN 51524-2



HYDRO AW 68

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 68 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 68.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.87 |
| 5 | Viscosity Index | D 2270 | 102 |
| 6 | Flash Point ,COC,°C | D 92 | 238 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 68 series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: CINCINATI P-69, DIN 51524-2



HYDRO AW 100

| TECHNICAL DATA | | | |
|----------------|---|--------|---------|
| S. No. | DESCRIPTION | METHOD | ISO 100 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 100.3 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.32 |
| 5 | Viscosity Index | D 2270 | 98 |
| 6 | Flash Point ,COC,°C | D 92 | 238 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 100 series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: CINCINATI P-69, DIN 51524-2



HYDRO AW 150

| TECHNICAL DATA | | | |
|----------------|---|--------|---------|
| S. No. | DESCRIPTION | METHOD | ISO 150 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 149.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.5 |
| 5 | Viscosity Index | D 2270 | 96 |
| 6 | Flash Point ,COC,°C | D 92 | 252 |
| 7 | Pour Point, °C | D 97 | -9 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | ISO 150 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

HYDRO AW 150 series is a premium anti-wear hydraulic additive package developed to provide excellent wear control, drain interval, filter ability performance as well as good air release properties to meet the requirements of modern hydraulic fluids. HYDRO series is designed for high- and low-pressure hydraulic systems in industrial and mobile applications. It helps to enhance equipment reliability, reduction in downtime and provides thermal stability by protecting critical parts.

MEETS OR EXCEEDS: CINCINATI P-69, DIN 51524-2



LYRA ISO 32

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 32 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 32.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 5.6 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC,°C | D 92 | 226 |
| 7 | Pour Point, °C | D 97 | -27 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LYRA series are range of premium quality, mineral oil based compressor oils for use in reciprocating compressors and some rotary air compressors. Amazon LYRA oils are blended from high quality paraffinic base oils and special non silicon additive to ensure very high resistance to oxidation and long service life. Amazon LYRA compressors oils are recommended for the cylinder and crankcase lubrication of air or inert gas reciprocating compressors operating with high discharge temperatures.



LYRA ISO 46

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 46 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 45.95 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 7.1 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC,°C | D 92 | 230 |
| 7 | Pour Point, °C | D 97 | -27 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LYRA series are range of premium quality, mineral oil based compressor oils for use in reciprocating compressors and some rotary air compressors. Amazon LYRA oils are blended from high quality paraffinic base oils and special non silicon additive to ensure very high resistance to oxidation and long service life. Amazon LYRA compressors oils are recommended for the cylinder and crankcase lubrication of air or inert gas reciprocating compressors operating with high discharge temperatures.



LYRA ISO 68

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | ISO 68 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 67.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 9.1 |
| 5 | Viscosity Index | D 2270 | 110 |
| 6 | Flash Point ,COC,°C | D 92 | 234 |
| 7 | Pour Point, °C | D 97 | -24 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LYRA series are range of premium quality, mineral oil based compressor oils for use in reciprocating compressors and some rotary air compressors. Amazon LYRA oils are blended from high quality paraffinic base oils and special non silicon additive to ensure very high resistance to oxidation and long service life. Amazon LYRA compressors oils are recommended for the cylinder and crankcase lubrication of air or inert gas reciprocating compressors operating with high discharge temperatures.



LYRA ISO 100

| TECHNICAL DATA | | | |
|----------------|---|--------|---------|
| S. No. | DESCRIPTION | METHOD | ISO 100 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 100.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.9 |
| 5 | Viscosity Index | D 2270 | 109 |
| 6 | Flash Point ,COC,°C | D 92 | 242 |
| 7 | Pour Point, °C | D 97 | -21 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LYRA series are range of premium quality, mineral oil based compressor oils for use in reciprocating compressors and some rotary air compressors. Amazon LYRA oils are blended from high quality paraffinic base oils and special non silicon additive to ensure very high resistance to oxidation and long service life. Amazon LYRA compressors oils are recommended for the cylinder and crankcase lubrication of air or inert gas reciprocating compressors operating with high discharge temperatures.



LUCID HD 32

| TECHNICAL DATA | | | |
|----------------|---|--------|-------|
| S. No. | DESCRIPTION | METHOD | HD 32 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 32.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 5.6 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC,°C | D 92 | 208 |
| 7 | Pour Point, °C | D 97 | 27 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 46

| TECHNICAL DATA | | | |
|----------------|---|--------|-------|
| S. No. | DESCRIPTION | METHOD | HD 46 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L1.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 45.95 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 7.1 |
| 5 | Viscosity Index | D 2270 | 113 |
| 6 | Flash Point ,COC,°C | D 92 | 230 |
| 7 | Pour Point, °C | D 97 | 27 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 68

| TECHNICAL DATA | | | |
|----------------|---|--------|-------|
| S. No. | DESCRIPTION | METHOD | HD 68 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 68.3 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 8.68 |
| 5 | Viscosity Index | D 2270 | 98 |
| 6 | Flash Point ,COC,°C | D 92 | 226 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | PASS |
| 10 | Emulsion Test @82°C | D 1401 | - |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 100

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | HD 100 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 101.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 11.26 |
| 5 | Viscosity Index | D 2270 | 97 |
| 6 | Flash Point ,COC,°C | D 92 | 230 |
| 7 | Pour Point, °C | D 97 | -15 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 150

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | HD 150 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 150.1 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 14.72 |
| 5 | Viscosity Index | D 2270 | 97 |
| 6 | Flash Point ,COC,°C | D 92 | 240 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 220

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | HD 220 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 221.5 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 18.92 |
| 5 | Viscosity Index | D 2270 | 96 |
| 6 | Flash Point ,COC,°C | D 92 | 244 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 320

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | HD 320 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L2.5 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 320.4 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 24.1 |
| 5 | Viscosity Index | D 2270 | 96 |
| 6 | Flash Point ,COC,°C | D 92 | 248 |
| 7 | Pour Point, °C | D 97 | -12 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



LUCID HD 460

| TECHNICAL DATA | | | |
|----------------|---|--------|--------|
| S. No. | DESCRIPTION | METHOD | HD 460 |
| 1 | Appearance | Visual | C & B |
| 2 | Color | D 1500 | L3.0 |
| 3 | Kinematic, Viscosity mm ² /s @ 40°C | D 445 | 461.2 |
| 4 | Kinematic, Viscosity mm ² /s @ 100°C | D 445 | 30.3 |
| 5 | Viscosity Index | D 2270 | 95 |
| 6 | Flash Point ,COC,°C | D 92 | 254 |
| 7 | Pour Point, °C | D 97 | -9 |
| 8 | Rust Test | D 665A | PASS |
| 9 | Emulsion Test @54°C | D 1401 | - |
| 10 | Emulsion Test @82°C | D 1401 | PASS |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

AMAZON LUCID series are high performance extreme pressure gear oils developed for lubrication of heavy duty industrial gears working under severe operating conditions. These are blended from high quality base stocks and sulphur-phosphorous types extreme pressure additive system that gives excellent road carrying capability to provide protection against shock loading and wear. The high thermo oxidative stability of the oil helps resist high temperature deposit formation and oil thickening.



CAR CARE PRODUCTS

EXTREME
PERFORMANCE


AMAZON
LUBRICANTS[®]

BRAKE FLUID



| TECHNICAL DATA | | | | | |
|----------------|-----------------|------------|-----------------|----------------|----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | |
| | | | DOT-3 | DOT-4 | DOT-5 |
| 1 | Appearance | VISUAL | CLEAR & BRIGHT | CLEAR & BRIGHT | CLEAR & BRIGHT |
| 2 | pH | FMVSS 116 | 9.2 | 8.5 | 9.5 |
| 3 | Color | VISUAL | WATER WHITE | WATER WHITE | WATER WHITE |
| 4 | Viscosity@100°C | D 445 | 2.06 | 2.12 | 1.8 |
| 5 | ERBP, °C, DRY | SAE J 1703 | 245 | 265 | 264 |
| 6 | ERBP, °C, WET | SAE J 1703 | 142 | 148 | >180 |
| 7 | Density@15°C | D 4052 | 1.040 | 1.042 | 1.06 |

AVAILABLE PACKS
250ml, 500ml, 1L

PRODUCT DESCRIPTION:

AMAZON BRAKE FLUID DOT-3, DOT-4 & DOT-5 is formulated as non-petroleum chemical fluids for use in the hydraulic brake and clutch system of automotive vehicles. They possess high boiling points and low pour points. They do not affect natural or synthetic rubber washers. They offer protection against corrosion and rusting of metal parts.

MEETS OR EXCEEDS: SAE J1703, FMVSS-116, ISO 4925

CAR CARE



ANTI-FREEZE COOLANT

| TECHNICAL DATA | | | | | | |
|---------------------|---------------------------------|--------|-----------------|----------------|----------------|----------------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | | |
| | | | AEC 100% | AEC 60% | AEC 50% | AEC 33% |
| ANTI-FREEZE COOLANT | | | | | | |
| 1 | Appearance | Visual | Clear & Bright | Clear & Bright | Clear & Bright | Clear & Bright |
| 2 | Color | Visual | Flrsct .Green | Flrsct .Green | Flrsct .Green | Flrsct .Green |
| 3 | Density@20°C, kg/m ³ | D 1122 | 1.12 | 1.09 | 1.06 | 1.03 |
| 4 | ERBP, °C | D 1120 | 168 | 168 | 110 | 104 |
| 5 | pH Value | D 1287 | 9.5 | 9.5 | 8.7 | 8.5 |
| 6 | Freezing Point, °C | D 3321 | -13 | -13 | -37 | -18 |
| 7 | Inorganic Inhibitor | - | Absence | Absence | Absence | Absence |
| 8 | Organic Inhibitor | - | Present | Present | Present | Present |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

ANTI-FREEZE COOLANT is a superior quality engine coolant which is formulated from high purity mono-ethylene glycol and organic acid carboxylate technology and corrosion inhibitors with proven heat transfer performance. It provides excellent corrosion protection for all metals in cooling systems of gasoline and diesel engines, especially the principle metals, iron, copper and aluminium. ANTI-FREEZE COOLANT is free from potentially harmful additives such as Nitrites, Silicates, Amines and Phosphates and it contributes to a safer environment.

MEETS OR EXCEEDS: FORD, MAN, SAE J1034, DAVID BROWN, SCANIA, VW, FIAT, BMW



MULTIPURPOSE OIL

| Typical Properties | | |
|---------------------------------|-------------|----------------|
| Test Parameters | ASTM Method | Typical Values |
| NLGI Consistency | | 3 |
| Thickener Base | | Lithium |
| Penetration @ 25°C, worked 60st | D217 | 236 |
| Drop Point | D2265 | 196 |

AVAILABLE PACKS
1L, 4L, 5L, 20L, 25L, 208L, Bulk

PRODUCT DESCRIPTION:

Multi-Purpose Oil is a versatile formula that cleans off grime, lubricates moving parts, penetrates rust, and protects tools and equipment. Its easy-to-use drip spout allows for quick and precise application with no overspray or splatter, making this multi-purpose oil a go-to solution for professional tradesmen and do-it-yourselfers alike. Use this long-lasting multi-purpose oil on hinges, nuts and bolts, bicycles, wheels—nearly everything with moving parts. High quality lithium based grease, processed from premium high viscosity virgin base oils and performance additives having NLGI-3 consistency. It is recommended for heavily loaded anti-friction wheel bearings, universal joints and chassis.



CALCIUM EP GREASE

| TECHNICAL DATA | | | | | | |
|----------------|---|--------|-----------------|---------|---------|---------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | | |
| NLGI GRADES | | | NLGI-0 | NLGI-1 | NLGI-2 | NLGI-3 |
| Property | | | EP-0 | EP-1 | EP-2 | EP-3 |
| Thickener Type | | | Calcium | Calcium | Calcium | Calcium |
| 1 | Texture | Visual | Smooth | Smooth | Smooth | Smooth |
| 2 | Color | Visual | Yellow | Yellow | Yellow | Yellow |
| 3 | Dropping Point, °C | D 566 | 188 | 192 | 192 | 194 |
| 4 | Four-Ball, Extreme Pressure, weld load, kgf | D 2596 | - | 250 | 250 | 250 |
| 5 | Penetration, 60x, 0.1mm | D 217 | 372 | 326 | 275 | 226 |
| 6 | Base Oil Viscosity of Grease at 40°C, mm ² /s. | D 1697 | 160 | 164 | 164 | 166 |

AVAILABLE PACKS
 II, 4L, 5L, 20L, 25L, 200L, Bulk

PRODUCT DESCRIPTION:

AMAZON GREASES EP 0, 1, 2, 3 products are a high-performance family of four general purpose industrial greases and two special-duty semi fluid greases. These lithium hydroxyl-stearate greases are formulated to provide extra protection against wear, rusting and water washout. They are available in NLGI grades ranging from 0 to 3, with base oil viscosities ISO VG 150 and 320. AMAZON GREASES EP 0, 1, 2 & 3 greases are recommended for most types of industrial applications including heavy-duty applications where high unit pressures or shock loads are makes them particularly



CALCIUM MP GREASE

| TECHNICAL DATA | | | | | | |
|----------------|---|--------|-----------------|---------|---------|---------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | | |
| NLGI GRADES | | | NLGI-0 | NLGI-1 | NLGI-2 | NLGI-3 |
| Property | | | MP-0 | MP-1 | MP-2 | MP-3 |
| Thickener Type | | | Calcium | Calcium | Calcium | Calcium |
| 1 | Texture | Visual | Smooth | Smooth | Smooth | Smooth |
| 2 | Color | Visual | Yellow | Yellow | Yellow | Yellow |
| 3 | Dropping Point, °C | D 566 | 188 | 192 | 192 | 194 |
| 4 | Four-Ball, Extreme Pressure, weld load, kgf | D 2596 | - | 250 | 250 | 250 |
| 5 | Penetration, 60x, 0.1mm | D 217 | 372 | 326 | 275 | 226 |
| 6 | Base Oil Viscosity of Grease at 40°C, mm ² /s. | D 1697 | 160 | 164 | 164 | 166 |

AVAILABLE PACKS
 II, 4L, 5L, 20L, 25L, 200L, Bulk

PRODUCT DESCRIPTION:

AMAZON GREASES MP 0, 1, 2, 3 products are a high-performance family of four general purpose industrial greases and two special-duty semi fluid greases. These lithium hydroxyl-stearate greases are formulated to provide extra protection against wear, rusting and water washout. They are available in NLGI grades ranging from 0 to 3, with base oil viscosities ISO VG 150 and 320. AMAZON GREASES MP 0, 1, 2 & 3 greases are recommended for most types of industrial applications including heavy-duty applications where high unit pressures or shock loads are makes them particularly suitable for equipment where most or we conditions are common. The recommended operating Temperature range is from -20°C to 130°C.



LITHIUM EP GREASE

| TECHNICAL DATA | | | | | | |
|----------------|---|--------|-----------------|---------|---------|---------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | | |
| NLGI GRADES | | | NLGI-0 | NLGI-1 | NLGI-2 | NLGI-3 |
| Property | | | EP-0 | EP-1 | EP-2 | EP-3 |
| Thickener Type | | | Lithium | Lithium | Lithium | Lithium |
| 1 | Texture | Visual | Smooth | Smooth | Smooth | Smooth |
| 2 | Color | Visual | Yellow | Yellow | Yellow | Yellow |
| 3 | Dropping Point, °C | D 566 | 188 | 192 | 192 | 194 |
| 4 | Four-Ball, Extreme Pressure, weld load, kgf | D 2596 | - | 250 | 250 | 250 |
| 5 | Penetration, 60x, 0.1mm | D 217 | 372 | 326 | 275 | 226 |
| 6 | Base Oil Viscosity of Grease at 40°C, mm ² /s. | D 1697 | 160 | 164 | 164 | 166 |

AVAILABLE PACKS
 I, 4L, 5L, 20L, 25L, 200L, Bulk

PRODUCT DESCRIPTION:

AMAZON GREASES EP 0, 1, 2, 3 products are a high-performance family of four general purpose industrial greases and two special-duty semi fluid greases. These lithium hydroxyl-stearate greases are formulated to provide extra protection against wear, rusting and water washout. They are available in NLGI grades ranging from 0 to 3, with base oil viscosities ISO VG 150 and 320. AMAZON GREASES EP 0, 1, 2 & 3 greases are recommended for most types of industrial applications including heavy-duty applications where high unit pressures or shock loads are makes them particularly suitable for equipment where most or we conditions are common. The recommended operating Temperature range is from -20°C to 130°C.



LITHIUM MP GREASE

| TECHNICAL DATA | | | | | | |
|----------------|---|--------|-----------------|---------|---------|---------|
| S. No. | DESCRIPTION | METHOD | TYPICAL RESULTS | | | |
| NLGI GRADES | | | NLGI-0 | NLGI-1 | NLGI-2 | NLGI-3 |
| Property | | | MP-0 | MP-1 | MP-2 | MP-3 |
| Thickener Type | | | Lithium | Lithium | Lithium | Lithium |
| 1 | Texture | Visual | Smooth | Smooth | Smooth | Smooth |
| 2 | Color | Visual | Yellow | Yellow | Yellow | Yellow |
| 3 | Dropping Point, °C | D 566 | 188 | 192 | 192 | 194 |
| 4 | Four-Ball, Extreme Pressure, weld load, kgf | D 2596 | - | 250 | 250 | 250 |
| 5 | Penetration, 60x, 0.1mm | D 217 | 372 | 326 | 275 | 226 |
| 6 | Base Oil Viscosity of Grease at 40°C, mm ² /s. | D 1697 | 160 | 164 | 164 | 166 |

AVAILABLE PACKS
 I, 4L, 5L, 20L, 25L, 200L, Bulk

PRODUCT DESCRIPTION:

AMAZON GREASES MP 0, 1, 2, 3 products are a high-performance family of four general purpose industrial greases and two special-duty semi fluid greases. These lithium hydroxyl-stearate greases are formulated to provide extra protection against wear, rusting and water washout. They are available in NLGI grades ranging from 0 to 3, with base oil viscosities ISO VG 150 and 320. AMAZON GREASES MP 0, 1, 2 & 3 greases are recommended for most types of industrial applications including heavy-duty applications where high unit pressures or shock loads are makes them particularly suitable for equipment where most or we conditions are common. The recommended operating Temperature range is from -20°C to 130°C.



OCTANE BOOSTER

| TECHNICAL DATA | | | |
|----------------|---------------------|--------|-------------|
| S. No. | DESCRIPTION | METHOD | RESULT |
| 1 | Appearance | Visual | C & B |
| 2 | Color | Visual | Pale Yellow |
| 3 | Flash Point ,COC,°C | D 93 | >40 |
| 4 | Density@15°C, | D 4052 | 0.782 |

AVAILABLE PACKS
354ml

PRODUCT DESCRIPTION:

Amazon Octane Booster is an octane index for Gasoline fuels can be used in all types of gasoline engines, either indirect or direct injection, and carburettor, turbocharged or naturally aspirated, with or without catalytic converters, using all types of gasoline fuels and bio fuels. Amazon Octane booster will increase octane number.



INJECTOR CLEANER

| TECHNICAL DATA | | | |
|----------------|---------------------|--------|--------|
| S. No. | DESCRIPTION | METHOD | RESULT |
| 1 | Appearance | Visual | C & B |
| 2 | Color | Visual | White |
| 3 | Flash Point ,COC,°C | D 93 | 55 |
| 4 | Viscosity@40°C,CST | D 445 | 3.5 |

AVAILABLE PACKS
354ml

PRODUCT DESCRIPTION:

Amazon Injector Cleaner intake valve cleaner keeps well maintained engines working better and lasting longer. Fuel Injector intake valve cleaner also reduces harmful emissions and can increase fuel economy.



ENGINE TREATMENT

| TECHNICAL DATA | | | |
|----------------|---------------------|--------|--------|
| S. No. | DESCRIPTION | METHOD | RESULT |
| 1 | Appearance | Visual | C & B |
| 2 | Color | Visual | White |
| 3 | Flash Point ,COC,°C | D 93 | 55 |
| 4 | Viscosity@40°C,CST | D 445 | 3.5 |

AVAILABLE PACKS
354ml

PRODUCT DESCRIPTION:

Amazon engine treatment oil is suitable for all commercial Vehicles in gasoline and diesel engines with and without diesel particulate filters(DPF) and also can use catalytic converters and turbochargers. It also regenerates rubber and plastic engine seals, such as shaft seals and valve tem seals and prevents oil stains under the vehicle. Counter-acts oil dilution.

